
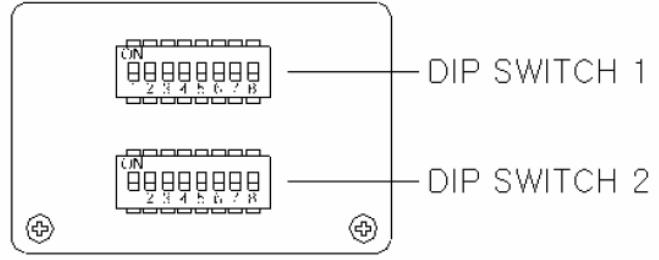


KODICOM SPEED DOME KAMERALARDA PROTOKOL ve ADRESLEME AYARLARI

Speed Dome kameranın gövde kısmındaki vidayı gevşettiğiniz zaman cam bölüm yukarıya doğru çıkacaktır ve DIP SWITCH 1 ve DIP SWITCH 2 bölümlerini göreceksiniz.

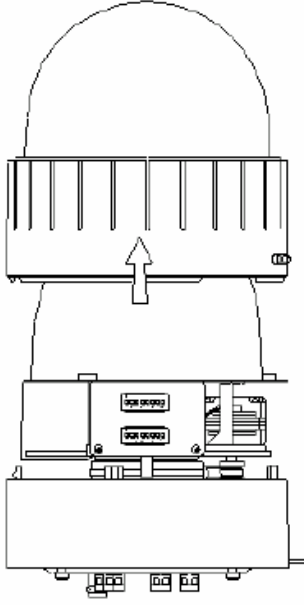

PROTOKOL AYARI İÇİN

- Speed dome kamera otomatik olarak Pelco- D ve Pelco-P protokolünü otomatik olarak desteklemektedir. Herhangi bir switch ayarı yapılmasına gerek yoktur.
- Ayrıntılı bilgi için Kullanım kılavuzuna bakınız.

ADRES AYARI İÇİN

- DIP SWITCH 1 bölümünden vermek istediğiniz adresi giriniz. Adresleme seçenekleri için aşağıdaki listeye bakınız.

Adresleme Bilgileri

Dome Address								
	DIP-1	DIP-2	DIP-3	DIP-4	DIP-5	DIP-6	DIP-7	DIP-8
1	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
2	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
3	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
4	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
5	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
6	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
7	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
8	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
9	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
10	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF

11	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
12	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
13	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
14	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
15	ON	ON	ON	ON	OFF	OFF	OFF	OFF
16	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
17	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
18	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF