

Adres çubuğuna <http://192.168.1.1/> yazın ve klavyenin Enter tuşuna basın.

Size Kullanıcı Adı ve Şifre soracaktır. Değiştirmediyseiz aşağıdaki default değerleri yada routerinizin manuelinden bulacağınız değerleri girin.

Kullanıcı Adı : admin
Şifre : adslroot girin.

Soldaki pencereden Advanced Setup seçin.

ADSL Modem - Microsoft Internet Explorer

Dosya Düzen Görünüm Sık Kullanılanlar Araçlar Yardım

Adres <http://192.168.1.1/>

artec
digital world

Device Info

| | |
|---------------------------|------------------------|
| Board ID: | 96338L-2M-8M |
| Software Version: | 3.02L.01.A2p8018e.d16f |
| Bootloader (CFE) Version: | 1.0.37-0.8 |

This information reflects the current status of your DSL connection.

| | |
|--------------------------------|---------------|
| Line Rate - Upstream (Kbps): | 64 |
| Line Rate - Downstream (Kbps): | 256 |
| LAN IP Address: | 192.168.1.1 |
| Default Gateway: | 85.101.176.1 |
| Primary DNS Server: | 195.175.37.14 |
| Secondary DNS Server: | 195.175.37.69 |

Device Info
Advanced Setup
Diagnostics
Management

Açılan sayfa <http://192.168.1.1/info.html...>

Başlat ADSL Modem - Micros... Meret - Konuşma Resimlerim 17:51

Aşağıdaki menü çıkacaktır. Soldaki pencereden NAT seçin.

ADSL Modem - Microsoft Internet Explorer

Dosya Düzen Görünüm Sık Kullanılanlar Araçlar Yardım

Adres http://192.168.1.1/

artès
digital world

Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Diagnostics
Management

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

| VPI/VCI | Con. ID | Category | Service | Interface | Protocol | Igmp | QoS | State | Remove | Edit |
|---------|---------|----------|--------------|------------|----------|----------|---------|---------|--------------------------|------|
| 0/35 | 1 | UBR | br_0_35 | nas_0_35 | Bridge | N/A | Enabled | Enabled | <input type="checkbox"/> | Edit |
| 8/35 | 1 | UBR | pppoe_8_35_1 | ppp_8_35_1 | PPPoE | Disabled | Enabled | Enabled | <input type="checkbox"/> | Edit |

Add Remove Save/Reboot

Bitli Internet

Başlat ADSL Modem - Micro... Meret - Konuşma Resimlerim 17:55

Aşağıdaki menü çıkacaktır. Soldaki pencereden Virtual Server tıklayın ve Add seçin.

ADSL Modem - Microsoft Internet Explorer

Dosya Düzen Görünüm Sık Kullanılanlar Araçlar Yardım

Adres http://192.168.1.1/

artès
digital world

Device Info
Advanced Setup
WAN
LAN
NAT
Virtual Servers
Port Triggering
DMZ Host
Security
Quality of Service
Routing
DNS
DSL
Diagnostics
Management

NAT -- Virtual Servers Setup

Virtual Server allows you to direct incoming traffic from WAN side (identified by Protocol and External port) to the Internal server with private IP address on the LAN side. The internal port is required only if the external port needs to be converted to a different port number used by the server on the LAN side. A maximum 32 entries can be configured.


Add Remove

| Server Name | External Port Start | External Port End | Protocol | Internal Port Start | Internal Port End | Server IP Address | Remove |
|-------------|---------------------|-------------------|----------|---------------------|-------------------|-------------------|--------|
|-------------|---------------------|-------------------|----------|---------------------|-------------------|-------------------|--------|

Bitli Internet

Başlat ADSL Modem - Mc... Meret - Konuşma Resimlerim sehnaz - Konuşma 18:02

Aşağıdaki menü çıkacaktır ;

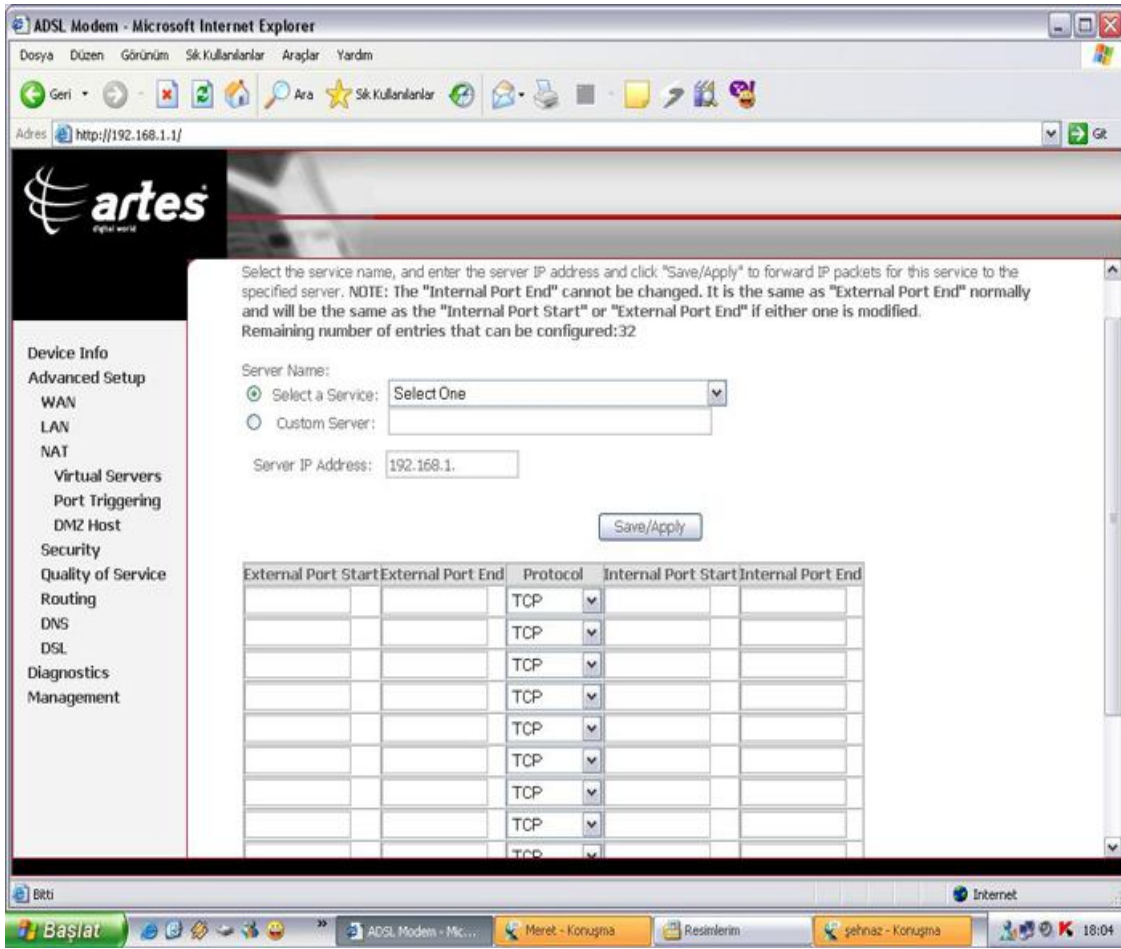

**Custom Server seçin ve Herhangi birsey yaz n (Örnek Emule)
Server IP Address : PCnizin IP nosunu (not almıştınız, örnek 192.168.1.5) yazın**

**External Port Start : 4662
External Port End : 4662
Protocol : TCP
Internal Port Start : 4662
Internal Port End : 4662
Alt sat ra geçin
External Port Start : 4672
External Port End : 4672
Protocol : UDP
Internal Port Start : 4672
Internal Port End : 4672 yaz n.
Save/Apply tıklay n.**

ADSL Modem - Microsoft Internet Explorer

Dosya Düzen Görünüm Sık Kullanılanlar Araçlar Yardım

Adres http://192.168.1.1/

artès
digital world

Select the service name, and enter the server IP address and click "Save/Apply" to forward IP packets for this service to the specified server. NOTE: The "Internal Port End" cannot be changed. It is the same as "External Port End" normally and will be the same as the "Internal Port Start" or "External Port End" if either one is modified.
Remaining number of entries that can be configured:32

Server Name:
 Select a Service: Select One
 Custom Server: eMule

Server IP Address: 192.168.1.5

Save/Apply

| External Port Start | External Port End | Protocol | Internal Port Start | Internal Port End |
|---------------------|-------------------|----------|---------------------|-------------------|
| 4662 | 4662 | TCP | 4662 | 4662 |
| 4672 | 4672 | UDP | 4672 | 4672 |
| | | TCP | | |
| | | TCP | | |
| | | TCP | | |
| | | TCP | | |
| | | TCP | | |
| | | TCP | | |

Device Info
Advanced Setup
WAN
LAN
NAT
Virtual Servers
Port Triggering
DMZ Host
Security
Quality of Service
Routing
DNS
DSL
Diagnostics
Management

Biti Internet

Başlat ADSL Mode... Meret - Kon... Resimlerim jehnaz - Ko... virtualeserver... 18:13